


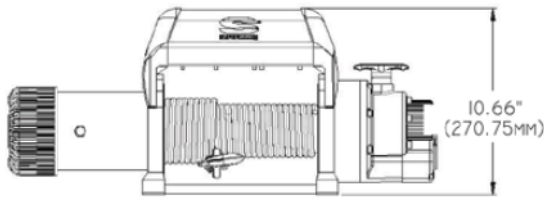


Model	9.5	9.5SR	9.5i	9.5iSR	12.5	12.5SR	12.5i	12.5iSR
Part Number	1695200	1695201	1695210	1695211	1612200	1612201	1612210	1612211
Voltage	12 VDC	12 VDC	12 VDC	12 VDC	12 VDC	12 VDC	12 VDC	12 VDC
Rated Pull lbs (kg)	9,500 (4309)				12,500 (5670)			
Motor hp (kW)	5.2 (3.8)				6.0 (4.4)			
Gearing	2-Stage Spur/2-Stage Planetary							
Gear Ratio	148:1							
Solenoid	VS4 (Sealed Submersible Vented)							
Freespool	Ergonomic Pull and Turn							
Brake	Automatic, Load Holding, Located Outside Drum							
Rope Length ' (m)	85 (26)	80 (24.4)	85 (26)	85 (26)	85 (26)	80 (24.4)	85 (26)	85 (26)
Rope Dia " (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)
Hook	Heavy Duty/Clevis Pinned/Latched							
Fairlead/Hawse	Fairlead	Hawse	Fairlead	Hawse	Fairlead	Hawse	Fairlead	Hawse
Remote Control	Exclusive Ergo Handheld							
Installed lbs (kg)	90 (41)	65 (30)	92 (42)	67 (30)	95 (43)	68 (31)	95 (43)	70 (31)
Shipping lbs (kg)	103 (47)	78 (35)	105 (48)	80 (36)	108 (48)	81 (37)	108 (48)	83 (37)
Warranty	Limited Lifetime Plus 3-Year Electronic							
UPC	022705169127	022705169134	022705169141	022705169158	022705169004	022705169011	022705169028	022705169035
Performance	9.5	9.5SR	9.5i	9.5iSR	12.5	12.5SR	12.5i	12.5iSR
No Load Amps	75							
Line Speed fpm (mpm)	62 (18.9)							
At Load Amps	430				530			
Line Speed fpm (mpm)	5.0 (1.5)				3.25 (0.99)			
Alternate Versions	9.5	9.5SR	9.5i	9.5iSR	12.5	12.5SR	12.5i	12.5iSR
24VDC Versions:	1695300	1695301	1695310	1695311	1612300	1612301	1612310	1612311
No Rope 12VDC	1695202		1695212		1612202		1612212	
No Rope 24 VDC	1695302		1695312		1612302		1612312	

Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)

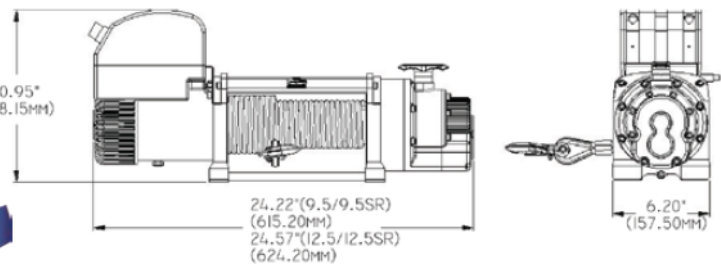

Talon 9.5i / 12.5i

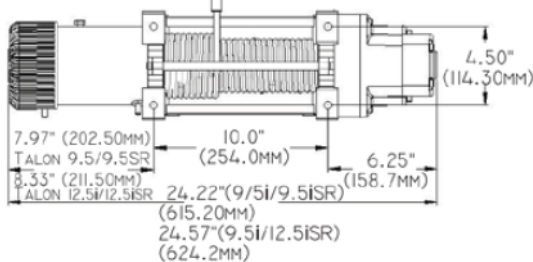

Talon 9.5 / 12.5

